Exhibit A to Task Order No. 1 FINALScope of Services Water Treatment Plant Phase II Expansion Norman, Oklahoma

<u>Task 200 - Project Management</u>. Engineer shall complete project management tasks to include the following:

- a. Subtask 200.1 Budget and schedule monitoring
- b. Subtask 200.2 Workshop planning and development
- Subtask 200.3 Preparation of Work and Quality Management Plans and Checklists

The anticipated duration between project notice to proceed and delivery of the final bidding sets for advertisement is 21 months.

Task 210 Agency Coordination:

Engineer shall coordinate work completed as part of this Amendment with the Oklahoma Department of Environmental Quality, COMCD, and the City of Norman Codes Department. The ENGINEER shall be responsible for the coordination of the applicable final design elements with the following agencies within the City and State.

- a. <u>Subtask 210.1</u> ODEQ Coordination—The Engineering Report associated with this project was submitted and approved by ODEQ as part of the Phase I work. However, the following coordination activities with ODEQ are included with this scope of services:
 - 210.1.1 ODEQ Workshop: As part of this project, ENGINEER will be responsible for conducting a workshop to presents summarize the results of the Engineering Report as they pertain to the Phase II improvements and review the pilot study results.
 - 210.1.2 ODEQ Construction Permit: ENGINEER will be responsible for preparing the application for the ODEQ construction permits associated with the project.
 - 210.1.3 ODEQ Plan Review Comments: ENGINEER will be responsible for providing ODEQ with the requisite number of copies of the Final Design Submittal Documents, reviewing ODEQ comments, and incorporation of applicable comments into the bid set.
- c. <u>Subtask 210.2</u> Oklahoma Gas and Electric (OG&E): ENGINEER shall coordinate with electrical utility company during design of High Pressure Zone Pump Station electrical gear and primary feed decommission.
- d. <u>Subtask 210.3</u> Agency Coordination City of Norman:

- 210.3.1 Code Compliance Meeting:
 Consultant will meet with local fire and building code officials to review the proposed changes to the process and proposed classification of the new and existing buildings designed to enclose these systems. Consultant will provide a memorandum summarizing these discussions in include this with the project design notebook.
- 201.3.2 Interim Design Document Review Meeting:
 Consultant will meet with local fire and building code officials to review the interim design submittal for each of the facilities and generate a memorandum summarizing the review comments and providing the recommended actions to address these comments. The meeting will be conducted in conjunction with the Interim Document Review Meeting with NUA Staff.
- Final Design Document Review Meeting: Consultant will meet with local fire and building code officials to review the final design submittal for each of the facilities and generate a memorandum summarizing the review comments and providing the recommended actions to address these comments. Consultant will prepare submittal packages and permit applications in accordance with the City of Norman, OK standards. The meeting will be conducted in conjunction with the Final Design Document Review Meeting with NUA Staff.

Task 215 - Design Project Meetings and Workshops.

- a. Subtask 215.1 Bi-Monthly Project Meetings: Project progress meetings will be conducted between project team members on a bi-monthly basis via telephone conference call. These are anticipated to occur over a period of 12 months or a total of 24 meetings. These meetings will be attended by staff from ENGINEER and its Subconsultants an will include discussion of work progress, coordination issues, obtain City of Norman feedback, and discuss and resolve issues related to the progression of the work.
- <u>Subtask 215.2</u> Design Workshops: In addition to the bi-monthly project meetings, design review meetings will be conducted with the City of Norman Staff and the Plan Review department to review the drawings and specifications for the purpose of soliciting comments. The following on-site meetings are anticipated during the course of the design: Each meeting is assumed to require Carollo on site for a maximum of two days:
 - Preliminary Design: Shall consist of the review of preliminary on-lines, SCADA block diagrams, process flow diagrams, process instrumentation and control drawings, code compliance plans, building sketches, design criteria sheets, and site development drawings.

- Interim Design Submittal Review: Review of final site development drawings, one-lines, process instrumentation and control drawings, and 3 dimensional models of each new structure.
- Final Design Submittal Review: Review of final civil, architectural structural, process, HVAC/Plumbing, electrical and instrumentation drawings and specifications prior to submittal to ODEQ review and Bidding purposes.

<u>Task 220 – Flood Study.</u> Engineer shall develop a Hydrologic Engineering Center River Analysis System (HEC-RAS) model and utilize model to perform a hydraulic analysis of watercourse immediate south of the Norman WTP to determine appropriate location for new lagoon facilities and, if necessary, recommend and estimate costs for channel improvements projects that result in a no change in the 100-year flood elevation under present conditions. It is assumed that these projects will be designed and managed by others as part of the overall City stormwater improvements projects.

- a. <u>Subtask 220.1</u> Data Collection and Review: Engineer shall review previous flood studies performed in the area and review FEMA Guidelines to help define the 100-year flow values of the targeted watercourse.
- Subtask 220.2 Runoff Flow Computation: The Engineer shall perform a hydrologic analysis to determine the 100-year runoff of the study area to be used to perform hydraulic analysis.
- c. <u>Subtask 220.3</u> HEC-RAS Model Development: Engineer shall develop cross sections, flow lengths, and hydraulic structures through the use of field surveys in conjunction with the HEC-GeoRAS function. Manning's coefficient, expansion and contraction coefficients, boundary conditions, and ineffective flow area development will be based on field reconnaissance, available GIS information, and engineering judgment. Engineer shall budget for two (2) field reconnaissance trips, eight (8) hours each.
- d. Subtask 220.4 Field Survey: Engineer shall provide field survey information one (1) mile of targeted watercourse for model development.
- i. Subtask 220.4.1 Engineer shall field survey channel cross sections at an interval of one hundred (100) feet on watercourse in the critical area, adjacent to WTP site. It is assumed that a total of ten (10) cross sections will be surveyed in this area. Engineer shall field survey channel cross sections at an interval of five hundred (500) feet on targeted watercourse outside of critical area. It is assumed that a total of eight (8) cross sections will be surveyed in this area.
- ii. <u>Subtask 220.4.2</u> Engineer shall field survey all hydraulic structures in the targeted watercourse. It is assumed that total of three (3) hydraulic structures (i.e. bridges, culverts) will be surveyed.
- e. <u>Subtask 220.5</u> Hydraulic Analysis of Present Conditions: Engineer shall perform hydraulic analysis on targeted watercourse using the developed HEC-RAS model to determine the 100-year floodplain and floodway boundaries at without floodway encroachment. The present condition computed water surface elevations will be compared to existing high-water data and other

- available flood plain management studies. This comparison will be presented to the City and other flood plain management agencies prior to preparing the ultimate conditions hydraulic analyses.
- f. <u>Subtask 220.6</u> Hydraulic Analysis of Ultimate Conditions: Engineer shall adjust model to account for floodway encroachment (i.e. lagoon faculties). A hydraulic analysis on targeted watercourse will then be undertaken to determine the impacts to the 100-year floodplain and floodway boundaries.
- g. <u>Subtask 220.7</u> Improvement Project Development: In cooperation with the developed HEC-RAS model, Engineer shall determine improvement projects and provide cost opinions necessary to reduce flood-water surface elevation in the event that floodway encroachment causes an increase in flood elevation above that determined under present conditions.
- h. <u>Subtask 220.8</u> –Flood Study Memorandum: This memorandum will summarize the development of the hydraulic model, hydraulic analysis of present and ultimate conditions, and recommended improvement projects, if any.
- Subtask 220.9 Agency Coordination: Engineering shall coordinate the findings and the recommendations within the technical memorandum with the various agencies within the City and the State.

Task 225 – Ozone/Biofiltration Pilot Plant Study: The purpose of the Ozone/Biofiltration Pilot plant study is to determine the anticipated ozone dose for disinfection and reduction of taste and odor and emerging contaminants of concern through the proposed biofiltration process. It will also be utilized to determine the required phosphoric acid and dechlorination chemical feed protocols for enhancing and control biofiltration to optimize filtration and biomass growth. The anticipated duration from delivery of the pilot system through the shipment of pilot plant equipment is eight (8) months.

- a. <u>Subtask 225.1</u> Work Plan and Pilot Study Protocol: Engineer to develop a detailed plan including objectives, study schedule, performance metrics, and sampling plan and protocol will be provided to the City.
- b. <u>Subtask 225.2</u> Equipment Selection and Procurement:
 - i. Equipment Procurement: The engineer will be responsible for the equipment selection and procurement. The engineer will arrange and pay for delivery of equipment to the site. The dual train pilot plant equipment anticipated for this project is summarized in Attachment A to this proposal and includes the following:
 - a. Pilot Module Enclosure
 - b. Ozone Preoxidation Skids (2 total)
 - c. Conventional Treatment Skid
 - d. Biofiltration Skids (2 total) and associated media
 - ii. Equipment Shipping: ENGINEER will be responsible for arranging shipment of pilot plant units to the Norman WTP.

- iii. Equipment Unloading: The City will be responsible for receipt and unloading of equipment in the presence of the Engineers representative.
- iv. Procurement of Ancillary Equipment: Engineer will be responsible for the procurement of the following ancillary equipment for the pilot system:
 - a. Pilot Plant feed Pumps for raw water feed to pilot plant
 - b. Chemical Metering Pumps, Drum Wands, and Valves
 - c. Break Tanks
 - d. Backwash water storage tanks

e.

- f. All other piping, valves, supports, conduit, wire, and incidentals necessary for pilot plant installation will be provided by the City of Norman
- c. Subtask 225.3 Equipment Installation and Commissioning/Decommissioning:
 - Engineers Responsibilities: Engineer will be responsible for the following:
 - a. Preparation of one line diagrams indicating electrical installation requirements.
 - b. Preparation of process flow schematics indicating pipe sizes, pipe materials, and interconnections required between pilot equipment.
 - c. Installation of biofiltration media in pilot filtration equipment.
 - d. On site visit (5 days) to assist staff with interconnection of equipment.

City Responsibilities:

- a. Providing Conduit, wire, breakers, supports and all other materials and labor required to provide and distribute power to the pilot units from the Filter Building.
- b. Providing all materials and labor required to install pump and raw water line to connect pilot units to raw water line prior to any chemical addition.
- c. Providing all materials and labor required to interconnect ENGINEER provided chemical feed equipment with the pilot units.
- d. Providing all materials and labor required to install settled water line and pump from clarifier effluent sample pipe to pilot units
- e. Providing all materials and labor required to install drain line from pilot skids to existing manhole to Lagoons.
- f. Procurement and payment of all chemical, lubricants, and other pilot plant consumables for the duration of the pilot study.
- d. Subtask 225.3 Pilot Plant Operation: Engineer will provide a part-time (5 days/week at 2 hours/day,) pilot plant operator to monitor pilot plant facilities, coordinate water quality sampling, and perform operational adjustments to facilitate study objectives for a period not to exceed 6 months.
 - Pilot plant operator, with the assistance of City Staff, will oversee pilot plant operation, coordinate sampling and document operation status, perform equipment adjustments, and perform in-house water quality testing as

described in Subtask 225.4. Engineer will provide City with a bimonthly report summarizing pilot plant operation and details concerning performance metrics, sampling data collected, and study status..

- i. <u>Subtask 225.4.2</u> Pilot Plant Operator Coordination: Engineer to *provide guid*ance, sampling instruction, and remote supervision of pilot plant operator throughout the study period. Engineer to conduct One (1) mothly site visit for sixteen (16) hours each to facilitate pilot plant operation during the pilot plant testing period. Engineer to correspond with pilot plant operator twice a week via telephone to discuss pilot plant operation, coordinate sampling, and troubleshoot operational issues.
- ii. <u>Subtask 225.4.3</u> Special Investigation Ozone Decay/Demand: Conduct multiple ozone decay/demand analyses at various temperatures and raw water content
- iii. <u>Subtask 225.4.4</u> Special Investigation Acute Raw Water MIB Contamination: Conduct two (2) raw water 50 ng/l MIB spikes. Evaluate required ozone dosages, bromate formation, MIB reduction.
- iv. <u>Subtask 225.4.5</u> Special Investigation Bromate Formation Reduction: Investigate potential bromate mitigation techniques including pre-ozone ammonia and/or chloramines addition and pH manipulation.
- v. <u>Subtask 225.4.6</u> Special Investigation Nutrient Optimization: Survey influent carbon, nitrogen, and phosphorus concentration in raw water, post-ozonation, and post-biofiltration. Determine if supplemental nutrient solution needed to optimize full scale biofiltration facilities.
- e. Subtask 225.4 Water Quality Sampling and Testing:
 - i. Prepare Sampling and Testing Protocol: Engineer will prepare draft and final water sampling and testing protocol to be utilize during the pilot testing. "In House City" Water Quality Sampling and Analysis: For these samples, the City will be responsible for providing all material, labor, equipment, instrumentation, and incidentals required to sample, test or analyze, and enter the results in the Engineer provided sample and analysis forms.
 - ii. "In House Engineer" Water Quality Sampling and Analysis: For these samples, the City will be responsible for providing the sampling bottles and preservation chemicals for use by Engineer's Pilot Plant operations staff in the preparation of the samples. Engineer's pilot plant operator will be responsible for coordination of sampling times and dates for a period convenient to City laboratory staff.

For the "in House Engineer" water quality analysis, the City will be responsible for furnishing the materials and equipment necessary to store, prepare and test the samples designated as "in House

Engineer" including the incubation devices required to conduct simulated distribution system (SDS) tests. The Engineer's pilot plant operations staff will be responsible for the analysis of those samples designated as "in House Engineer" using City provided analytical instruments and laboratory equipment. Engineer's pilot plant operator will be responsible for coordination of testing and analysis dates for a period convenient to City laboratory staff.

- iii. Third Party" Water Quality Sampling and Analysis: The City will be responsible to provide and pay for all third party testing associated with the pilot plant sampling protocol. The Engineer will be responsible for providing the labor required to order sampling kits from City third party laboratory, storing sampling kits, sampling, preparing Chain of Custody documents, and shipping of the samples to the third party for analysis. The Engineer will be responsible for collecting and analyzing laboratory data. Engineer's pilot plant operators will be responsible for coordination of third party testing and analysis dates with City laboratory staff.
- f. <u>Subtask 225.6</u> Pilot Plant Results and Recommendation Workshop: Upon completion of the pilot plant study, Engineer to conduct workshop with City Staff to discuss pilot plant study results, full scale process integration, and recommendations.
- g. <u>Subtask 225.7</u> Pilot Plant Technical Memorandum: Upon completion of the pilot plant study, Engineer, in cooperation with pilot plant operator, will provide five (5) draft copies of a technical memorandum summarizing the pilot plant results. Technical memorandum will include the following sections:
 - i. Introduction
 - ii. Methods and Materials
 - iii. Results and Discussion
 - iv. Conclusions and Recommendations

Following City review, Engineer will revise the TM per the City's comments and provide five (5) final copies of the TM.

Task 230 - Field/Site Surveying. Surveying will be completed for the project as necessary to establish horizontal and vertical control tied to the State Coordinate System. A minimum of two survey control monuments shall be placed at judiciously selected locations at the well field and water treatment plant. Contractor will be required to perform surveying during construction. Engineer's fee assumes separate surveys will be conducted for each phase of the project, as exact survey requirements will not be known until each phase of the project has been developed in further detail.

Task 235 - Geotechnical Investigations at WTP

- a. <u>Subtask 235.1</u> Geotechnical Investigation: Laboratory testing and analyses will be performed on soil samples to determine engineering criteria necessary for the design and construction on the project.
- b. <u>Subtask 235.2</u> Geotechnical Report: A preliminary and final geotechnical report will be prepared that provides a general description of the subsurface conditions at the locations indicated, provides technical considerations for the design of subsurface installations, and general considerations for construction activities. Geotechnical investigations at the WTP will consist of the following:
 - New Structures (2 borings each structure)
 - New Buildings (3 borings each building)
 - General slope stability
 - Soil Corrosivity

<u>Task 240 - Preparation of Drawings (Plans) for Project Construction.</u>
Drawings will be prepared using MicroStation XM software using ENGINEER's standard format. Final drawings will be delivered in both paper copy and electronic format to City. Engineer shall prepare construction documents (plans, specifications, and related information) to allow bidding and subsequent construction of the improvements to the Plant generally as summarized in the preliminary design. The elements of work to be included in the Project are identified in the tables below.

Subtask 240.1 - New Disinfection Building Housing Hypochlorite Generation and a. Liquid Ammonium Sulfate Systems: The existing chlorine and ammonia systems are in poor condition, lack redundancy, and creates concerns regarding safety of the personnel and surrounding community. It is desired that these systems be replaced with inherently safer technologies. Both systems will be housed in a building with a 2-hour fire rated wall for separation. Separate HVAC systems will be provided for these chemicals. The sodium hypochlorite system will be designed as a 12% bulk delivery sodium hypochlorite system. The onsite generation system will be bid as as a base bid with a deductive alternate for the 12% solution. The bulk hypochlorite system will include interior solution tanks, interior dilution panel, and interior feeder pumps. The onsite generation system will include exterior brine and solution tanks, while brine feeder and solution metering pumps, generators, blowers, softeners, and the rectifier will be stored inside a building and provided with a dilution system to permit dilution of hypochlorite to 0.8% solution. The ammonia system will utilize ammonium sulfate as a liquid of 40 percent solution. Ammonia sulfate system will be provided with interior storage of bulk liquid. Ammonia feed pumps will be contained within the disinfection building.

Subtask 240.1 - New Disir	fection Building Housing Bulk	Hypochlorite and Ammonia Sulfate
PROJECT ELEMENT	DESCRIPTION	FEATURES

PROJECT ELEMENT	DESCRIPTION	FEATURES
Chemical Feed Systems - Disi	Infection System	TEATORES
Bulk/On-site Generation Sodium Hypochlorite System	 Onsite Hypochlorite Generation System designed to feed up to 4.0 ppm at 20 mgd. 30 days minimum storage of brine based upon anticipated average day and average dose. Solution storage tanks to be equipped with supplement bulk delivery unloading station and a minimum of 1.5 days storage for generation equipment failure event. Installation of piping and appurtenances for primary and secondary feed points (assumed 6 total). 	 Brine storage capacity of 20 tons Two 750 ppd generators. Softener and water heater/chiller for brine solution feed. One air cooled rectifier. Two interior sodium hypochlorite solution storage tanks with a capacity of 18,000 gals (each). Three (1-spare) peristaltic hose feeder pumps and two brine feed pump. Two hydrogen dilution blowers and one hypo dilution panel.
iquid Ammonia Sulfate System	 System designed to feed up to 1.0 ppm at 20 mgd. Storage based upon anticipated average day and average dose. Installation of piping and appurtenances for primary and secondary feed points (assumed 4 total). 	 New FRP interior 10000 gal ammonia storage tank. Ammonia feeders and associated dilution water softeners to be housed in on-site generation building
hemical Systems - Primary Pro		
nemical Building	 Building to House the following: Brine feed pump Sodium hypochlorite generators and associated equipment Sodium hypochlorite feeder pumps Ammonia feed pumps Hypochlorite Storage Tanks and Containment Area. 	 Sloped Roof with steel bar joists and built-up membrane. 8-inch CMU with 4 - inch brick fascia to match existing brick. Double insulation glass windows to match chemical building. Electrical to be fed

PROJECT ELEMENT Electrical System Improvement	Storage tanks and Containment area. Exterior slab cBrine storage.	FEATURES
Electrical System Improvement	Containment area. • Exterior slab cBrine storage.	
Electrical System Improvement		
- Constant of October 111 Provement		
	I .	
isinfection and Ammonia 480V	 New 480V Distribution Equipment (MCC's and Switchboard) MCC-DISIN-A, MCC- DISIN-B 	Install in Disinfection Building. New MCC's to operate facilities associated with both the ammonia feed system and the onsite hypo generation system Master plan for Future Generation Equipment. MCC's to be fed from SWGR-1 in Electrical Building. Include provisions for city supplied security system.
hting Design	Lighting Design for exterior Disinfection/Ammonia System and Disinfection Building interior.	 New exterior lighting for ammonia, brine, and hypo solution storage facilities. New exterior/interior lighting for Disinfection Building.
punding	Grounding of Disinfection Building.	New grounding grid
trumentation And Control Syst	tem	will be installed.
ver and Network	> No Improvements	> No Improvements

PROJECT ELEMENT	DESCRIPTION	FEATURES
SCADA System Software	SCADA System Software	 Complete integration of all new systems into existing SCADA system. Automatic transfer control system loads incorporation with existing generator.
Plant Network Communication System	New Fiber Optic Loop to be tied into existing system Fiber Optic Loop.	Fiber Optic Cables Between Electrical Building and Filter Building.
Plant Network PLC System	Install PLC for Control of Chlorine and Ammonia Systems.	 PLC's shall be located in the Disinfection Building PLC to monitor and control Sodium Hypochlorite and Ammonia System.
strumentation Upgrade	New Instrumentation for Disinfection Building	 Softener hardness alarm Hypochlorite pH monitoring Onsite Hypochlorite Generator monitoring and alarms. Hydrogen gas detectors/alarming and blower alarms. Ammonia storage level monitoring. Metering pump, brine pump, brine pump, blower, and ammonia feed pumps monitoring. Brine and hypochlorite storage monitoring. Scope includes design of 4 additional

PROJECT ELEMENT	DESCRIPTION	FEATURES
HVAC/Fire Protection System I	mprovements	
Disinfection Building Heating	Separate Heating for SH and Ammonia Rooms.	Low speed ventilation for 6 air changes/hour. Indirect fired tube heaters for corrido
Disinfection Building Cooling	Cooling for SH room only.	Generators and rectifier to be cooled by HVAC during summer months.
Disinfection Building Ventilation.	Ammonia room and SH room to have separate ventilation.	 8-10 air changes per hour in summe 6 air changes per hour in winter. For Mechanical room, provide 6 air changes/hour.
Fire Protection	Fire Protection System	Install pre-action deluge or other system conforming to City Fire Marshall Standards.
Security System	Coordinate with the City's designated security system installation contractor.	
Utility System Improvements		
Jtility Water	 Design Supply Water System for hypochlorite/ammonia sulfate dilution piping 	 Design connection to new main pressure zone pumps to bring in new 8-inch pipe to Disinfection building. Provide Prepackaged Booster Pump Station for Generation System Water.
tility Air	 route pneumatic piping to Disinfection Building for operation of pneumatic equipment. 	TTAIOT.

<u>Subtask 240.1 - New Disinfection Building Housing Bulk Hypochlorite and Ammonia Sulfate</u>		
PROJECT ELEMENT	DESCRIPTION	FEATURES
Drainage	 Disinfection Building Drainage System. 	Building drains to sludge lagoons.

b. <u>Subtask 240.2</u> - Ozone System for Disinfection and Taste and Odor Reduction:

To Be Negotiated Following Pilot Study Results..

C. Subtask 240.3 – Aging Infrastructure and Treatment Capacity Improvements: Numerous improvement projects to replace aging and deteriorating treatment infrastructure were outlined in the Norman WTP Expansion Engineer Report. In addition, the report highlighted other recommended improvements to increase treatment capacity of the facility. While some improvements were constructed as part of the Phase I expansion, many projects still remain including improvements to the lagoon/backwash collection facilities, high pressure service pump station, and alum storage and feed system. The City will be responsible for testing the thickness of the filter piping and determining which segments of the piping and valves require replacement or rehabilitation. The following table describes the improvements associated with this task.

PROJECT ELEMENT	DESCRIPTION	FEATURES
Raw Water System Improven	1	TEATURES
To be negotiated following Ozone Pilot Study results.	>	>
Solids Contact Clarification		
Solids Contact Clarifier No. 3	 Yard piping modifications to facilitate direct discharge to lagoon upon clarifier startup. Redundant lime feed 	 Discharge to Common 12 inch line to lagoons (connect to existing SCC no 4 drain line. Add butterfly diversion valves. Redundant lime feed loop and pinch valve assembly.
Solids Contact Clarifier No. 4	 Yard piping modifications to facilitate direct discharge to lagoon upon clarifier startup. Redundant Lime feed 	 Discharge to Common 12 inch line to lagoons (connect to existing SCC no 4 drain line. Add butterfly diversion valves. Redundant lime feed loop and pinch valve assembly (clarifier No. 3 and No. 4 only)
ecarbonation Basins - Improv		
ecarbonation Basin No. 1		
ecarbonation basin No. 2	No ImprovementsNo Improvements	No ImprovementsNo Improvements

PROJECT ELEMENT	DESCRIPTION	FEATURES
Dual Media Filtration - Impro	pvements	
Filters No. 1-8 Piping Modifications	To be negotiated following Ozone pilot study and City testing of piping integrity.	
Filter Backwash Supply Modifications	To be negotiated following Ozone Pilot Study.	>
Filter Backwash Wastewater Collection	 Drain piping improvements to alleviate basement flooding. Install one new earthen lagoon for filter backwash collection. New yard piping, manhole structures, and piping modifications to existing to isolate backwash collection piping from sludge piping. Modify drain piping in the filter gallery as needed to accommodate new filter backwash collection system. Security fence relocation. 	Dedicated Backwas Water Collection Lagoon Lagoon/backwash collection yard piping modifications to include the construction of a diversion structure with automated valves/gates for backwash collection diversion and optiona flushing. SCADA monitoring and control of diversion structure to be included. Assumes stream improvements, if necessary to permit construction of lagoon, will be done by others.
ter Backwash Wastewater Imp Station Iished Water Storage and Pui	 Install new backwash water return pump station constructed within lagoon to return water to the head of the plant utilizing the existing 6-in sludge decant force main. New yard piping to convey decant to existing 6-in sludge decant forcemain. 	 New backwash water return pump station to be prepackaged with electrically actuated plug valves and flow meter. SCADA monitoring and control of pump station to be included. Station equipped with quick disconnects.
servoir No. 1	Replace drain valves.	
servoir No. 2	 Replace drain valves. Replace drain valves. 	

PROJECT ELEMENT	DESCRIPTION	FEATURES
High Pressure Zone Pump Station	➢ Install two new 3 mgd pumps with Inverter Duty Motors	> Structural improvements, if any to wet well to accommodate new pumps.
Finished Water Transmission Main	> No Improvements	> No Improvements
Solids Handling Improvement	S	
New Lagoon Storage	 Install one new earthen lagoon for sludge storage. New yard piping, manhole structures, and modifications to existing sludge piping for gravity flow of sludge from treatment facilities to new sludge storage lagoon. New yard piping and modifications to existing decant piping for gravity flow of decant water from new sludge storage lagoon to decant pump station. Security fence relocation. 	 Lagoon yard piping modifications to include the valving to manually isolate new sludge lagoon. Lagoon to be equipped with inlet and decant structures.
ew Lagoon Decant Pump tation	 OWNER to procure and install New Decant Pump Station. Utilize existing 6-in forcemain. Install flow meter on 6-in forcemain. 	 Provide automated shutoff valves and fiber optic control to lagoon pump station. SCADA monitoring and control of pump station. Station equipped with quick disconnects.
xisting Sludge Lagoons	 Outlet gate valve replacement on each existing lagoon. 	> Design as alternate.

PROJECT ELEMENT	structure and Treatment Capacity	
T. JOEO! ELEMIEN!	DESCRIPTION	FEATURES
Sanitary Sewer	 New SS Grinder and Lift Station for plant sanitary system and brine reject from ion exchange units. New gravity yard piping as needed. Tie into City sanitary sewer collection system. 	 Lift Station will be designed to pump either to new sanitary sewer. Existing septic tank and leach field will be removed. SCADA monitoring of lift station.
Chemical Feed Systems - Di		
Chlorine Feed System	 Decommission of existing chlorine storage and feed system. 	 Decommission of existing chlorine system.
Ammonia Feed System	 Decommission of existing ammonia storage and feed system. 	 Decommission of existing ammonia system.
Chemical Systems - Primary		
Pebble Quicklime Storage and Feed System	 Relocate existing aging tank, slurry loop pump, and emergency loop pump to chlorine room in Chemical Building. Installation of redundant lime aging tank in chlorine room. Installation of Redundant Loop and Metering Valves to Clarifiers No. 3 and No. 4. 	 Modifications to lime slurry piping to accommodate new aging tank locations.
quid Aluminum Sulfate orage and Feed System	 Replacement of storage Tanks Replacement of fill and pump suction piping for feed system. Replacement of metering pumps and associated appurtenances. New storage level measurement devices. Construction of chemical storage containment wall and sump pump. Emergency eyewash installation. 	 New Tanks and fill, vent, drain, and withdrawal piping with associated valving. New metering pumps for increased reliability.
rbon Dioxide Feed System provements emical Feed Systems - Seco	> No Improvements	> No Improvements

PROJECT ELEMENT	DESCRIPTION	FEATURES
Temporary PAC Storage and Feed System	Install support structure for hoist.	
Sodium Fluorosilicate System	No Improvements.	> No Improvements
Electrical System Improveme	1 TO THE RESERVE TO THE PROPERTY OF THE PROPER	The improvements
Backup or Redundant Primary Power System	 Demolition of existing generator and NEMA 6 panel in Chemical Building 	> ,
Main Service 480 V Switchgear Improvements	> No Improvements	> No Improvements
High Pressure Zone 480 V MCC improvements	 Four new soft starts. Decommission of existing exterior electrical gear and primary feed. 	 Re-feed pumps from electrical gear located in Electrical Building. OG&E coordination for decommission of primary feed to existing service.
Chemical Building 480V MCC Improvements	> No Improvements	> No Improvements
Filter Building Lighting Improvements	to be negotiated following Ozone Pilot Study.	> To Be Determined
Chemical Building Lighting mprovements	> No Improvements	> No Improvements
	>	>
Site Lighting Improvements	 To be negotiated following ozone pilot study 	> To be determined
nstrumentation And Control Sy	/stem	
Vell Field System Telemetry	No Improvements	> No Improvements
erver and Network	> No Improvements	> No Improvements
CADA System Software	 Complete integration of all new systems into existing SCADA system 	 Upgrade SCADA system as necessary to handle new demands. Provide full monitoring and control of all new systems.
Iter PLC System	 To be negotiated following Ozone Pilot Study 	oyotoma.
ant Network Communication /stem - SCC	To be negotiated following Ozone Pilot Study	

PROJECT ELEMENT	DESCRIPTION	FEATURES
Plant Network Communication System – Chemical Processes	➤ Fluoride improvements	Fluoride automatic flow pacing.
Plant Network PLC System	Install new PLC's for monitoring and control of all new equipment.	PLCs to be provided with UPS
Instrumentation Upgrade	 New instrumentation where recommended. 	>
HVAC System Improvements		
Filter Building	➢ To be negotiated following Ozone Pilot Study	>
Main Service Pump Station	To be negotiated following Ozone pilot study.	
General Site Work		
Chemical Trench	 Installation of new covers on old chemical trench. Installation of new chemical trench for pneumatic piping and chemical solution feeds for ammonia and chlorine. Additional chemical trench improvements to be negotiated following Ozone Pilot study. 	
Sample Line	 Install sample line from Old High Service Pumps (downstream of Well No. 5) line to lab. 	Include turbidity and chlorine monitoring.
Itility System Improvements		
Jtility Water	to be negotiated following Ozone Pilot Study.	> To be Determined
Itility Air	 To be negotiated following Ozone Pilot Study. 	

d. <u>Subtask 240.4</u> – Remodel Maintenance Shop and Create New Storage Area: The existing maintenance shop space will be remodeled to incorporate office space, conference space, restroom facilities and expand the areas utilized for maintenance in accordance with the preliminary plan provided in Attachment B. A new storage building will be created as part of the improvements to incorporate ozone into the Norman WTP.

PROJECT ELEMENT	DESCRIPTION	FEATURES
Architectural		
Remodeling of Maintenance Shop	 Demo/relocate rigid maintenance equipment/facilities. Remodel for additional office space. 	> See Attachment B
Electrical System		
New Power Feed	➤ New 480 V service from Electrical Building	 Backup Generation New 480V panelboard and Transformer (exterior) New 480V welder Outlets (2)
Lighting	New Building Interior Lighting	 New Fixtures, ballasts and lights for all areas.
	>	
	>	<i>></i>
Instrumentation And Control S	ystem	
	> Not Included	> Not Included
HVAC/Fire Protection System I	mprovements	对人性别的国际人类。但是对他的主义的。——
Building Heating and Cooling	 Office Space (Heating/cooling) Maintenance area 	 MAU (electric) for heating cooling in offices and conf room. Heating (electric or nat gas tube). 8-10 ACH for summer and welding ventilation.
ecurity System	 Coordinate with the City's designated security system installation contractor. 	vortaida),
tility System Improvements		
otable Water	New plumbing and drain system for building	
rainage	Building Drainage System.	 To New grinder station.

The preliminary drawing list for the improvements identified in Subtasks 240.1, 240.3, and 240.4 are included in Attachment C within this Amendment. These drawings represent the best estimate of the anticipated work at the time of this Amendment and it is recognized that this list will undergo changes and refinements as the project progresses.

DELIVERABLES

Specific deliverables associated with the design drawings and specifications include the following:

- 1. Meeting minutes from progress meetings and workshops with the City.
- 2. Flood Study Memorandum detailing HEC-RAS model development, results of hydraulic analysis, and recommended improvement projects.
- 3. Pilot Study Report detailing results of ozone/biofiltration pilot study and recommendations for full scale design.
- 4. List of proposed manufacturer's of major equipment items.
- Project Work Plan (summarizing design protocol, communications protocol, document filing system, team member roles, and responsibilities, etc.)
- 6. Engineering Plans (Interim Design Submittal and Final Design Submittal) for City staff review.
- 7. Final Construction Documents (engineering plans and specifications) ready for advertisement and bid.
- 8. Engineer's estimate of probable construction cost at Interim and Final stages of project development.

Scope of Service Work Tasks: The following scope of work tasks will be included with the final design portion of this phase of the project.

Task 245 - Design and Preparation of Project Specifications. Engineer shall complete the engineering design and prepare specifications to include the following: (1) Division 00 - Bidding Requirements, Contract Forms, General Conditions, and Supplementary Conditions, (2) Division 01 - General Requirements, and (3) Divisions 02 through 17 - Technical Specifications. Included in these specifications will be a description of known constraints on the Contractor's construction sequencing plan that identifies the requirements of the contractor to allow uninterrupted production of water from the Plant at the minimum levels prescribed by the specifications. The specifications will be based upon the use of State Revolving Fund (SRF) loans and will conform to the requirements of ODEQ. Fee does not assume use of ARRA funds for the construction of the improvements listed herein.

<u>Task 250 – Prepare Estimates of Probable Construction Costs.</u> Engineer shall prepare an interim estimate of probable construction costs at the Intermediate Design Submittal stage of completion and a final estimate prior to bidding the project.

<u>Task 255 – Contractor Prequalification</u>. Engineer shall provide advisement documentation and solicit for Contractor Prequalification Package submittals with regard to General Contractor, Electrical Contractor, and Instrumentation and Controls Contractor. Engineer shall review received prequalification packages and provide recommendations to the City. Upon City approval of recommended Contractors, Engineer shall provide notices to all Contractors.

<u>Task 260 – Project Advertisement and Bidding.</u> Following completion of design and prequalification services, Engineer shall provide the following bidding phase services:

- a. <u>Subtask 260.1</u> Pre-Bid Meeting: Provide assistance at Pre-Bid Meeting, including a tour of the project site with prospective bidders.
- b. <u>Subtask 260.2</u> Bid Period Inquiries: Respond to written questions by plan holders or others regarding the technical aspects of the work, contract requirements for prospective bidders, subcontractors, and suppliers during the period of advertisement. Prepare written plan clarifications as may be necessary.
- Subtask 260.3 Issuance of Addenda: Prepare addenda to the contract drawings and/or specifications to clarify and modify project requirements.
- d. Subtask 260.4 Bid Evaluation: Review the apparent lowest responsible bidder and summarize findings with respect to engineering aspects of the bids to assist the award of the construction contract. The review will include preparation of a bid tabulation, verification of conformance with the technical contract requirements as presented in the bid forms, verification of the low bidder's references and a letter summarizing the results of the engineering evaluation.

Included in Engineer's bidding phase services are the printing and sale of Contract Documents to interested contractors or other interested parties. It is assumed that **10 sets** of documents will be printed and distributed.

Time of Completion Final Design and Bidding Services (all Items)

Approximate Duration of Tasks		Weeks after NTP
Notice To proceed		-
Prepare Pilot Testing Protocol	4.00	4.00
Order and Deliver Pilot Testing Units	4.00	4.00
Install/Setup Pilot Unit	4.00	8.00
Pilot Testing	24.00	32.00
Decommissioning	2.00	34.00
Pilot Testing TM Preparation	8.00	42.00
Geotechnical Investigations	4.00	30.00
Preliminary Design of	TBD	TBD
Improvements		
Review and Acceptance	TBD	TBD
Interim Design Submittal	TBD	TBD
Review and Acceptance	TBD	TBD
Final Design Submittal	TBD	TBD
Review and Acceptance	TBD	TBD
Bid Phase Services	TBD	TBD

TBD - To Be Determined following ozone pilot study

Amendment No. One To K-1112-124

Contract K-1112-124
Phase II Water Treatment Plant Improvements

Attachment A- Anticipated Pilot Study Equipment

Draft Final Scope of Services

Norman, OK Phase II Design

Granular Media Filtration Pilot Module F200

Module consists of two constant rate filters with individual feed pumps, an air scour system, and a backwash system. Each filter is independent with automatic flow control. Backwashing is performed manually by an operator. Only one filter may be backwashed at a time. Automatic data logging of key parameters is included. Each filter has multiple sample ports throughout the media depth.

Specifications

Maximum Total Flow Rate: 6.0 gpm (22.7 L/min)
Filters: 2 @ 6 inch diameter (150 mm)
Maximum Media Depth: 75 inch (1.90 m)
Filtration Rate: 1.3...15.3 gpm/sf (3.2...37.4 m/h)

Backwash Rate: 2.5...25.0 gpm/sf (6.1...61.0 m/h)

Backwash Tank Volume: 165 gal (625 L)

Air Scour Rate: 0.6...6.0 scfm/sf (10.9...108.9 m/h)
Max Sustainable Air Scour Rate: 2.6 scfm/sf (46.7

m/h)

Power: 1 phase, 7.5 A @ 120 VAC

*Data Logged

Instrumentation

Flow Rate (each filter)*
Headloss (each filter)*
Effluent Turbidity (each filter)*
Backwash Flow Rate

Granular Media Filtration Pilot Module F300

Module consists of four constant rate filters with individual feed pumps, an air scour system, and a backwash system. Each filter is independent with automatic flow control. Backwashing is automatic and is initiated manually by an operator in the manual mode, or on runtime, headloss, or effluent turbidity in the automatic mode. Only one filter may be backwashed at a time. Other features include automatic data logging of key parameters, remote monitoring and control using a standard web browser, and email alarm notification.

Specifications

Maximum Total Flow Rate: 8.0 gpm (30.3 L/min)
Filters: 4 @ 6 inch diameter (150 mm)
Maximum Media Depth: 74 inch (1.88 m)
Filtration Rate: 2.0...10.2 gpm/sf (5.0...25 m/h)
Backwash Rate: 4.0...50.0 gpm/sf (9.8...122 m/h)
Backwash Tank Volume: 150 gal (568 L)
Air Scour Rate: 0.68...6.8 scfm/sf (12.4...124 m/h)

Instrumentation

Flow Rate (each filter)*
Headloss (each filter)*
Effluent Turbidity (each filter)*
Air Scour Flow
Backwash Flow*
Backwash Tank Level*

*Data Logged

Granular Media Filtration Pilot Module F400

Power: 1 Phase, 16.5 A @ 120 VAC

The pilot module consists of four constant rate filters with individual feed pumps and chemical pumps. The air scour and backwash systems are shared by all filters. Each filter is independent with automatic PID flow control. The backwash and air scour flow rates are also automatically controlled using PID loops. The chemical pumps are automatically

paced to the filter feed flows associated with each chemical pump. A fifth chemical pump system is provided to pace between either the combined filter feed flows or the backwash flow rate. An improved backwash process is included, providing superior performance when operating biological filtration processes. Backwashing is initiated manually by an operator in the manual mode, or on runtime, run volume, headloss, or effluent turbidity in the automatic mode. Only one filter may be backwashed at a time. Other features include automatic data logging of key parameters, remote monitoring and control using a standard web browser, and email alarm notification.

Specifications

Maximum Total Flow Rate: 8.0 gpm (30.3 L/min) Filters: 4 @ 6 inch diameter (150 mm) Maximum Media Depth: 75 inch (1.90 m) Filtration Rate: 2.6...10.2 gpm/sf (6.4...25 m/h) Backwash Rate: 5.1...51.0 gpm/sf (12.5...125 m/h)

Backwash Tank Volume: 150 gal (568 L)

Air Scour Rate: 2.6...10.2 scfm/sf (47.6...187 m/h)

Power: 1 phase, 19.1 A @ 120 VAC

Instrumentation

Flow Rate (each filter)* Headloss (each filter)* Effluent Turbidity (each filter)* Underdrain DP (each filter)*

Air Scour Flow* Backwash Flow* Backwash Tank Level* Filter Column Level*

Granular Media Filtration Pilot Module F500

Module consists of an influent reaction tank, three constant rate pressure filters, an air scour system, and a backwash system. Each filter is independent with automatic flow control and can be configured for online or standby operation. Backwashing is automatic and is initiated manually by an operator in the manual mode, or on runtime or headloss in the automatic mode. Only one filter may be backwashed at a time. Other features include automatic data logging of key parameters, remote monitoring and control using a standard web browser, and email alarm notification.

Specifications

Maximum Total Flow Rate: 210 gpm (795 L/min) Filters: 3 @ 30 inch diameter (762 mm) Maximum Media Depth: 42 inch (1.07 m) Filtration Rate: 2.0...14.3 gpm/sf (5.0...35 m/h) Backwash Rate: 6.1...20.0 gpm/sf (15.0...49.0 m/h) Air Scour Flow Air Scour Rate: 1.0...3.0 scfm/sf (18.3...55.0 m/h)

Reaction Tank Volume: 90 gal (340 L)

230 VAC, 5.8 A @ 480 VAC

Power: 3 phase, 11.7 A @ 208 VAC, 12.9 A @

*Data Logged

Instrumentation

Flow Rate (each filter)* Headloss (each filter)* Influent Turbidity* Effluent Turbidity* Backwash Flow Backwash Tank Level*

Flocculation / Sedimentation Pilot Module S100

Module consists of a feed pump, one stage rapid mix, three stage flocculation, inclined plate sedimentation, a sludge removal system, and five chemical feed systems. The feed

^{*}Data Logged

flow is controlled automatically. Mixers are variable speed with direct entry of mixing gradient setpoint. Inclined plates can be added or removed as necessary. Sludge can be removed continuously or intermittently. Chemical feed pumps are flow paced with direct entry of chemical dosage. Other features include automatic data logging of key parameters, remote monitoring and control using a standard web browser, and email alarm notification.

Specifications

Feed Flow Rate: 1...6.2 gpm (3.8...23.5 L/min)

Rapid Mix Basin: 1 @ 5.0 gal (19.0 L)

Rapid Mixer: 60...1091 s⁻¹

Flocculation Basin: 3 @ 60.9 gal (230.0 L)

Flocculation Mixers: 3...60 s⁻¹

Chemical Feed Pumps: 5 @ 0.10...25 gpd

(0.27...66 mL/min)

Chemical Feed Tanks: 5 @ 7 gal (26.5 L) Sludge Flow Rate: 0.03...0.16 gpm (114...606

mL/min)

Settling Plates: 2...25 @ 1.62 sf each (0.151 m²)

Power: 1 phase, 120 VAC, 13.2 A

*Data Logged

Instrumentation

Feed Flow*
Feed pH*
Feed Turbidity*
Settled Water pH*
Settled Water Turbidity*

Temperature*

Flocculation / Sedimentation Pilot Module S200

Module consists of a feed pump, two stage rapid mix, three stage flocculation, inclined plate sedimentation, a sludge removal system, and five chemical feed systems. The feed flow is controlled automatically. Mixers are variable speed with direct entry of mixing gradient setpoint. Inclined plates can be added or removed as necessary. Sludge can be removed continuously or intermittently. Chemical feed pumps are flow paced with direct entry of chemical dosage. Other features include automatic data logging of key parameters, remote monitoring and control using a standard web browser, and email alarm notification.

Specifications

Flow Rate: 1...6.5 gpm (3.8...24.6 L/min)
Rapid Mix Basin: 2 @ 3.4 gal (13.2 L)

Rapid Mixers: 33...1037 s⁻¹

Flocculation Basin: 3 @ 50.7 gal (192.0 L)

Flocculation Mixers: 7...117 s-1

Chemical Feed Pumps: 5 @ 0.11...42 gpd

(0.3...110 mL/min)

Chemical Feed Tanks: 5 @ 7 gal (26.5 L)

Sludge Flow Rate: 0.14...1.4 gpm (530...5300

mL/min)

Settling Plates: 2...30 @ 1.49 sf each (0.138 m²)

Power: 1 phase, 120 VAC, 11.1 A

<u>Instrumentation</u>

Feed Flow*

Feed pH*

Feed Turbidity*

Settled Water pH*

Settled Water Turbidity*

Temperature*

Ozonation Pilot Module Z100

Module consists of a feed pump, five contact chambers, an ozone generator and an ozone destruct unit. The feed flow is controlled automatically. Contact chambers have twenty-five volumetrically-spaced ports for sampling dissolved ozone. The ozone generator is air-cooled with an integral exygen concentrator for creating ezone from ambient air, and shuts down automatically if a leak is detected. Other features include automatic data logging of key parameters, remote monitoring and control using a standard web browser, and email-alarm notification.

Specifications

Flow Rate: 1.0...8.0 gpm (3.8...30.3 L/min)

Contactors: 5 @ 13.9 gal (52.6 L) Ozone Delivery: 0.25...11 g/h

Power: 1 phase, 13.9 A @ 120 VAC

Instrumentation

Feed Flow*

Ozone Feed Gas Concentration* Ozone Off Gas Concentration* Dissolved Ozone Concentration*

Ozone Feed Gas Flow

Ambient Ozone Concentration*

Ozone Feed Gas Pressure

Ozone Feed Gas Temperature

Ozonation Pilot Module Z200

Module consists of a feed pump, four contact chambers, the ozone control panel, and an ozone destruct unit. The feed flow is controlled automatically. Depending on the contactor configuration, contact chambers have either sixteen or twenty-four volumetrically-spaced ports for sampling dissolved ozone. The ozone generator is air-cooled with an integral oxygen concentrator for creating ozone from ambient air, and shuts down automatically if a leak is detected. Ozone delivery is flow paced with direct entry of ozone dosage. Ozone gas zero calibration can be performed either manually or automatically based on runtime without interruption of ozone delivery to the contactors. Other features include automatic data logging of key parameters, remote monitoring and control using a standard web browser, and email alarm notification.

Specifications

Flow Rate: 1.0...8.0 gpm (3.8...30.3 L/min)

Contactors: 4 @ 19.5 gal (73.8 L)

or: 4@ 13.2 gal (50.0 L)

Power: 1 phase, 10.0 A @120 VAC

Ozone Delivery: 0.1...6.5 g/h

Instrumentation


Feed Flow*

Ozone Feed Gas Concentration* Ozone Off Gas Concentration* Ozone Feed Gas Flow (mass flow)* Dissolved Ozone Concentration* Ambient Ozone Concentration*

^{*}Data Logged

^{*}Data Logged

Attachment B – Preliminary Maintenance Barn Layout
Draft Final Scope of Services
Norman, OK Phase II Design

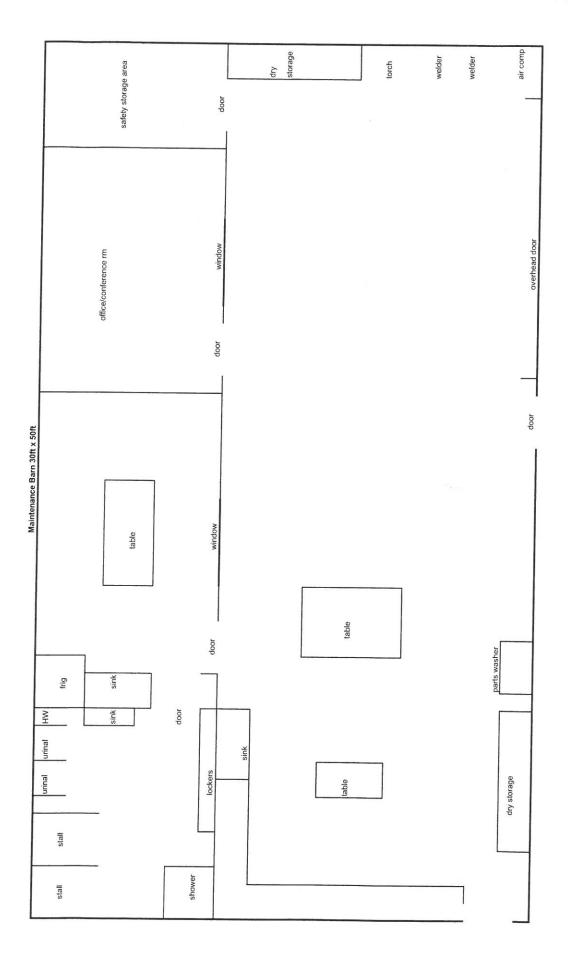

Attachment C - Estimated Drawing List (excluding Ozone)

Draft Final Scope of Services

Norman, OK Phase II Design

A	40		_	Norman Utilities Authority	
Area	10			tework	
1	10 C		0	1 Yard piping Area Plan - Disinfection Building	
2	10 C		0	2 Duct Bank Profile I - Power to Building and Main Service PS	
3	10 C		0	3 Chemical Trench profile and details (Disinfection Building)	,
				enominal fronting prome and details (Disinfection Building)	
4	10 E		0	Electrical feed area plan - disinfection building	
5	10 E		0	P. lighting and grounding also disinfection building	
3	10 6		U	2 lighting and grounding plan disinfection building	
A	0.5				
Area	65		Di	sinfection and Ammonia Building	
				Architectural Drawings	
6	65 A		- 0	Code Compliance Plan	
	65 A		0:	2 Disinfection and Ammonia Building - Door, Window, Finish	
7				Schedule	
8	65 A	5	. 03	Building Floor Plan	
9	65 A		04	Building Roof Plan	
10	65 A	-	0.5	Exterior Elevations I	
11	65 A	-	06	Exterior Elevations II	
12	65 A	100		Building Sections I	
13	65 A	-		Building Sections II	
14	65 A			Roof and Stair Details	
				Structural Drawings	
15	65 S	_	01	Building Foundation Plan	
16	65 S			Building Roof Plan	
17	65 S	-		Building Sections I	
18	65 S	-		Building Sections II	
19	65 S	_		Building Sections and Details	
19	65 S	-		Details	
	000		00	Details	
				Process Drawings	
20	65 M	-	01	Sodium Hypochlorite Brine and softening Schematic - Base E	Bid
21	65 M	-	02	Sodium Hypochlorite Generation Schematic - Base Bid	
22	65 M	-	03	Storage and Metering System Schematic	
23	65 M		04	Building Floor Plan - Generation	
24	65 M	-	05	Building Floor Plan - Hypochlorite Storage & Metering	
25	65 M	-	06	Building Floor Plan - Ammonium Sulfate Storage & Metering	
25	65 M	-	07	Building Sections I	
26	65 M	_	100000	Building Sections and Details	
				HVAC Drawings	
27	65 H	-	01	HVAC Equipment Schedules	
28	65 H	-		HVAC Plan and Details I	
29	65 P	_		Fire Protection Plan and Details	
30	65 P				
50	001	-	O.L	Plumbing Plan and Isometric	
				Floatrical Drawings	
31	65.5		01	Electrical Drawings	
	65 E	-		Building One Line MCC A &B	
32	65 E			Elevation MCC A&B	
33	65 E	-	03	480 V Power and Control Plan - Hypochlorite	
34	65 E	-	04	480V Power and Control Plan - Ammonia	
35	65 E	-		480 V Power and Control Plan - Electrical Room	
36	65 E	-	06	Lighting and Receptacle Plan	
37	65 E	-	07	Roof Plan	
38	65 E	-	80	Grounding Plan	
40	65 N	-	01	AMMONIUM SULFATE STORAGE TYPICAL STORAGE TANK	
41	65 N	-		AMMONIUM SULFATE METERING TYPICAL	
42	65 N	-		SODIUM HYPOCHLORITE - TYPICAL BRINE TANK	
43	65 N	-		SODIUM HYPOCHLORITE - WATER SUPPLY AND DRAINAGE SYSTEM	
44	65 N		05	SODIUM HYPOCHLORITE - WATER SUPPLY AND DRAINAGE SYSTEM SODIUM HYPOCHLORITE - TYPICAL GENERATOR AND HYDROGEN	DULITION
45		-			DILUTION
46				SODIUM HYPOCHLORITE - TYPICAL STORAGE TANK	
		-		SODIUM HYPOCHLORITE - TYPICAL METERING PUMP	
47		-		BUILDING SYSTEMS - HVAC SYSTEMS	
48		-		BUILDING SYSTEMS - FIRE PROTECTION AND SECURITY	
49	65 GN	-		CM DISINFECTION LAYOUT	
39	65 GN	-	02 (CONTROL SCHEMATICS I	HVAC Control Panels
40	65 GN	-	03 (CONTROL SCHEMATICS I	Control Panels Alarms
			5	UBTOTAL	

NOTES:

- GENERAL DRAWINGS TO BE LISTED WITH OZONE FACILITY IMPROVEMENTS TYPICAL DETAIL DRAWINGS TO BE LISTED WITH OZONE FACILITY IMPROVEMENTS

TO BE DETERMINED FOLLOWING OZONE PILOT STUDIES

Area	a 00	GENE	DΛΙ	Norman Utilities Authorit	
	4 00	OLNE	NAL		
1		GN		01 BLOCK DIAGRAM I	
2		GN GN		22 BLOCK DIAGRAM II	
Ü	00	GN	- (02 PLC AND INSTRUMENT PO	WER
ADE					
ARE	A 10	SITEW	ORK		
4	10		01	SITE DEMOLITION (SEPTIC SY	STEMS AND SANITARY MH
5 6	10 10	10000	- 01	OTHER POLICE	AND SECTION
7	10		- 02 - 03	GRINDER LIFT STATION FM PI	LAN AND PROFILE I
8	10		- 04	GRINDER LIFT STATION FM PI SCC NO 3 AND 4 DRAIN LINE F	LAN AND PROFILE II
9	10	С .	- 05	HDD PLAN AND PROFILE FILT	FR BUILDING DRAINS
10	10	С -	- 06	HDD PLAN AND PROFILE FILTI	ER BUILDING DRAINS
11	10	ED -	01		DEMOLITION PLAN AND DETAILS
12	10	E -	01		480 v CONTROL POWER AND P
13	10	E -	02	LAGOON LIFT STATION PARTI	480 v CONTROL POWER AND P
14	10	N -	01	00000	P&ID
15	10	N -	02		P&ID
Area	60 1	EXISTIN	NG CH	IEMICAL BUILDING	
				Architectural Drawings	
16	60 [01	Chemecial Building Demolition	demo LAS system, generator, air comp
17	60 A		UZ	Building Elevations and detail:	window and door replacement
18	60 A	٠ -	03	Building Elevations and detail:	window and door replacement
				Structural Drawings	
19	60 S	· -	01		Donois of well when
20	60 S				Repair of wall where generator remove containment area wall and sump pump
					wall and sump pump
21	60.0			Process Drawings	
22	60 D 60 M		01 01	Chemical Building Demolition D	Petails
23	60 N		02	Coagulant System Schematic Lime Feed System Schematic	
24	60 M		03	Chemical Building Plan -lime a	show lime againg took install at
25	60 M	-	04	Chemical Building Plan - Alum	show lime ageing tank installation show alum instalation
26	60 M	-	05	Sections and Details - Lime area	a
27	60 M	-		Sections and Details - Alum are	
			ĺ	HVAC Drawings	
28	60 H			HVAC Drawings HVAC Plan and Details	
			a i	The stand Details	

Electrical and I&C Drawigns

		Norman Utilities Authority
29	60 ED	- 01 Electrical Demolition Chlorine/ammonia/co2 and alum
30	60 E	- 01 480V Power and Control Plan - Alum Area
31	60 E	02 480V Power and Control Plan - Lime Area
32	60 E	03 HVAC Control Schematics
33	60 N -	01 Lime Ageing Tank P&ID Lime area
34	60 N -	02 Lime Redundant Loop P&ID Lime area
35	60 N -	03 Aluminum Sulfate Storage Typical Storage Tank P&ID
36	60 N -	04 Aluminum Sulfate Metering Typical Metering Pump P&ID
37	60 N -	05 Misc process control
		- Country of Country o
AREA	72	HIGH PRESSURE ZONE PS
38	70.0	Structural Drawings
30	72 S	01 MISCELLANEOUS STRUCTURAL
		Mechanical Drawings
39	72 M	01 HIGH PRESSURE ZONE PS PLANS
40	72 M	02 HIGH PRESSURE ZONE PS SECTIONS AND DETAILS
44	70 ED	Electrical and I&C Drawings
41 42	72 ED	01 HIGH PRESSURE ZONE PS DEMOLITION
43	72 E 72 N	01 HIGH PRESSURE ZONE PS POWER, CONTROL, & GROUNDING PLAN
44	72 N 72 N	01 PROCESS & INSTRUMENTATION HIGH PRESSURE PUMP AND VALVE NO. 1
45	72 N	02 PROCESS & INSTRUMENTATION HIGH PRESSURE PUMP AND VALVE NO. 2
46	72 N	03 PROCESS & INSTRUMENTATION HIGH PRESSURE PUMP AND VALVE NO. 2
, ,	, 2 11	04 PROCESS & INSTRUMENTATION HIGH PRESSURE PUMP AND VALVE NO. 2
AREA	90	Backwash and Solids Handling Lagoons
47	90 D	01 EXISTING LAGOON PLAN) REPLACEMENT OF VALVES AND P
	90 D 90 C	01 EXISTING LAGOON PLAN) REPLACEMENT OF VALVES AND P 02 NEW LAGOON PLAN NEW CONTURES OF LAGOONS
47 48	90 D	01 EXISTING LAGOON PLAN) REPLACEMENT OF VALVES AND P 02 NEW LAGOON PLAN NEW CONTURES OF LAGOONS 03 NEW LAGOONS CUT AND F CUT AND FILL OF DIRT
47 48 49	90 D 90 C 90 C	01 EXISTING LAGOON PLAN) REPLACEMENT OF VALVES AND P 02 NEW LAGOON PLAN NEW CONTURES OF LAGOONS 03 NEW LAGOONS CUT AND F CUT AND FILL OF DIRT 04 NEW LAGOONS CUT AND F CUT AND FILL OF DIRT
47 48 49 50	90 D 90 C 90 C 90 C	01 EXISTING LAGOON PLAN) REPLACEMENT OF VALVES AND P 02 NEW LAGOON PLAN NEW CONTURES OF LAGOONS 03 NEW LAGOONS CUT AND F 04 NEW LAGOONS CUT AND F 05 NEW LAGOONS DETAILS
47 48 49 50 51	90 D 90 C 90 C 90 C 90 C	01 EXISTING LAGOON PLAN) REPLACEMENT OF VALVES AND P 02 NEW LAGOON PLAN NEW CONTURES OF LAGOONS 03 NEW LAGOONS CUT AND F 04 NEW LAGOONS CUT AND F 05 NEW LAGOONS DETAILS CUT AND FILL OF DIRT CUT AND FILL OF DIRT Structural Drawings
47 48 49 50 51	90 D 90 C 90 C 90 C 90 C	01 EXISTING LAGOON PLAN) REPLACEMENT OF VALVES AND P 02 NEW LAGOON PLAN NEW CONTURES OF LAGOONS 03 NEW LAGOONS CUT AND F 04 NEW LAGOONS CUT AND F 05 NEW LAGOONS DETAILS CUT AND FILL OF DIRT CUT AND FILL OF DIRT CUT AND FILL OF DIRT Structural Drawings 01 Valve Vault Plan & Section Diversion Structure Vault
47 48 49 50 51	90 D 90 C 90 C 90 C 90 C	01 EXISTING LAGOON PLAN) REPLACEMENT OF VALVES AND P 02 NEW LAGOON PLAN NEW CONTURES OF LAGOONS 03 NEW LAGOONS CUT AND F 04 NEW LAGOONS CUT AND F 05 NEW LAGOONS DETAILS Structural Drawings 01 Valve Vault Plan & Section 02 Lagoon Inlet and Outlet Plans Diversion Structure Vault
47 48 49 50 51	90 D 90 C 90 C 90 C 90 C	01 EXISTING LAGOON PLAN) REPLACEMENT OF VALVES AND P 02 NEW LAGOON PLAN NEW CONTURES OF LAGOONS 03 NEW LAGOONS CUT AND F 04 NEW LAGOONS CUT AND F 05 NEW LAGOONS DETAILS CUT AND FILL OF DIRT CUT AND FILL OF DIRT CUT AND FILL OF DIRT Structural Drawings 01 Valve Vault Plan & Section Diversion Structure Vault
47 48 49 50 51	90 D 90 C 90 C 90 C 90 C	01 EXISTING LAGOON PLAN) REPLACEMENT OF VALVES AND P 02 NEW LAGOON PLAN NEW CONTURES OF LAGOONS 03 NEW LAGOONS CUT AND F 04 NEW LAGOONS CUT AND F 05 NEW LAGOONS DETAILS Structural Drawings 01 Valve Vault Plan & Section 02 Lagoon Inlet and Outlet Plans 03 Sections and Details PUMP STATION VALVE VAULTS
47 48 49 50 51	90 D 90 C 90 C 90 C 90 C	01 EXISTING LAGOON PLAN 02 NEW LAGOON PLAN 03 NEW LAGOONS CUT AND F 04 NEW LAGOONS CUT AND F 05 NEW LAGOONS DETAILS Structural Drawings 01 Valve Vault Plan & Section 02 Lagoon Inlet and Outlet Plans 03 Sections and Details Process Drawings 01 Lagoon Policy of the plans 03 Process Drawings 04 Lagoon Plan 05 NEW LAGOONS CUT AND F 06 CUT AND FILL OF DIRT 07 CUT AND FILL OF DIRT 08 Diversion Structure Vault 09 Pump STATION VALVE VAULTS
47 48 49 50 51 52 53 54	90 D 90 C 90 C 90 C 90 C	01 EXISTING LAGOON PLAN DEPLACEMENT OF VALVES AND P 02 NEW LAGOON PLAN NEW CONTURES OF LAGOONS 03 NEW LAGOONS CUT AND F 04 NEW LAGOONS CUT AND F 05 NEW LAGOONS DETAILS Structural Drawings 01 Valve Vault Plan & Section 02 Lagoon Inlet and Outlet Plans 03 Sections and Details Diversion Structure Vault PUMP STATION VALVE VAULTS Process Drawings 01 Lagoon PS Plan and Section Replace existing
47 48 49 50 51 52 53 54	90 D 90 C 90 C 90 C 90 C 90 S - 90 S - 90 S -	01 EXISTING LAGOON PLAN 02 NEW LAGOON PLAN 03 NEW LAGOONS CUT AND F 04 NEW LAGOONS CUT AND F 05 NEW LAGOONS DETAILS Structural Drawings 01 Valve Vault Plan & Section 02 Lagoon Inlet and Outlet Plans 03 Sections and Details Process Drawings 01 Lagoon PS Plan and Section 02 New BW Lagoon PS Plan and Section 03 New BW Lagoon PS Plan and Section 04 New BW Lagoon PS Plan and Section 05 New BW Lagoon PS Plan and Section 06 New BW Lagoon PS Plan and Section 07 New CONTURES OF LAGOONS CUT AND FILL OF DIRT CUT AND
47 48 49 50 51 52 53 54	90 D 90 C 90 C 90 C 90 C 90 S - 90 S -	01 EXISTING LAGOON PLAN 02 NEW LAGOON PLAN 03 NEW LAGOONS CUT AND F 04 NEW LAGOONS CUT AND F 05 NEW LAGOONS DETAILS Structural Drawings 01 Valve Vault Plan & Section 02 Lagoon Inlet and Outlet Plans 03 Sections and Details Process Drawings 01 Lagoon PS Plan and Section 02 New BW Lagoon PS Plan and Section 03 New BW Lagoon PS Plan and Section 04 NEW CONTURES OF LAGOONS CUT AND FILL OF DIRT CUT AND FILL OF DIRT CUT AND FILL OF DIRT Diversion Structure Vault PUMP STATION VALVE VAULTS Replace existing 02 New BW Lagoon PS Plan and Section
47 48 49 50 51 52 53 54	90 D 90 C 90 C 90 C 90 C 90 S - 90 S - 90 S -	01 EXISTING LAGOON PLAN 02 NEW LAGOON PLAN 03 NEW LAGOONS CUT AND F 04 NEW LAGOONS CUT AND F 05 NEW LAGOONS DETAILS Structural Drawings 01 Valve Vault Plan & Section 02 Lagoon Inlet and Outlet Plans 03 Sections and Details Process Drawings 01 Lagoon PS Plan and Section 02 New BW Lagoon PS Plan and Section 03 New BW Lagoon PS Plan and Section 04 New BW Lagoon PS Plan and Section 05 New BW Lagoon PS Plan and Section 06 New BW Lagoon PS Plan and Section 07 New CONTURES OF LAGOONS CUT AND FILL OF DIRT CUT AND
47 48 49 50 51 52 53 54	90 D 90 C 90 C 90 C 90 C 90 S - 90 S - 90 S -	01 EXISTING LAGOON PLAN 02 NEW LAGOON PLAN 03 NEW LAGOONS CUT AND F 04 NEW LAGOONS CUT AND F 05 NEW LAGOONS DETAILS Structural Drawings 01 Valve Vault Plan & Section 02 Lagoon Inlet and Outlet Plans 03 Sections and Details Process Drawings 01 Lagoon PS Plan and Section 02 New BW Lagoon PS Plan and Section 03 New Lagoon Inlet/Outlet Details PREPLACEMENT OF VALVES AND P NEW CONTURES OF LAGOONS CUT AND FILL OF DIRT CUT AND FILL OF DIRT Piversion Structure Vault PUMP STATION VALVE VAULTS Replace existing Process Drawings Of Lagoon PS Plan and Section New Lagoon Inlet/Outlet Details Electrical and Instrumentation
47 48 49 50 51 52 53 54 55 56	90 D 90 C 90 C 90 C 90 C 90 S - 90 S - 90 S - 90 M - 90 M	01 EXISTING LAGOON PLAN 02 NEW LAGOON PLAN 03 NEW LAGOONS CUT AND F 04 NEW LAGOONS CUT AND F 05 NEW LAGOONS DETAILS Structural Drawings 01 Valve Vault Plan & Section 02 Lagoon Inlet and Outlet Plans 03 Sections and Details Process Drawings 01 Lagoon PS Plan and Section 02 New BW Lagoon PS Plan and Section 03 New Lagoon Inlet/Outlet Details PREPLACEMENT OF VALVES AND P NEW CONTURES OF LAGOONS CUT AND FILL OF DIRT CUT AND FILL OF DIRT Diversion Structure Vault PUMP STATION VALVE VAULTS Replace existing Replace existing New Lagoon Inlet/Outlet Details

Task 240.3 Rehabilitation/Capacity Projects
Norman WTP Phase II Expassion
Norman Utilities Authority

Amendment	No.	One	To	K-1112	-124
-----------	-----	-----	----	--------	------

60 90 E - 61 90 E - 62 90 N - 63 90 N - 64	01 lagoon pump station 480V p 01 bw pump station power and 01 Diversion structure control 01 Lagoon Return PS P&ID	lagoon pump station new bw ww return ps control panel for bw diversion
63 90 N - 64 90 N - 65 90 N -		control patier for bw diversion

CONTRACT K-1112-124

TASK ORDER NO. 2 EXHIBIT B

Phase II Water Treatment Expansion City of Norman, OK Estimated Fee for Design Related Services (excludes services during construction)

Est	ima	ted	Sch	ned	ule
-----	-----	-----	-----	-----	-----

Design Begins (NTP)	25-Apr-14
Design Ends	25-Apr-15
Biding Phase Services End	9-Jun-15
End Construction Administration	8-Jun-17
End Construction Observation Services	8-Jul-17
End Post Construction Services	21-Sep-17

	End Construction Administration			8-Jun-1	70				
	End Construction Observation Service	es		8-Jul-1					
	End Post Construction Services			21-Sep-1					
				OOP 11		Additional		Total	
			Estir	nated Fee		Estimated Fee			
Task Code	Description			Order No. 1				Estimated Fee	Anticipated
			Tuon	order No. 1		ask Order No. 2		II Task Orders	Construction Cost
PILOT PLANT STUDY	SERVICES								
200	PM During Pilot and Flood Study		\$	8,500	\$			0.500	
	Pilot Plant Study		\$	634,700				\$ 8,500	
	Flood Study		\$					\$ 634,700	
		ubtotal	\$	47,900	\$			\$ 47,900	
		abiolai	Ψ.	691,100	\$	•	- 1	\$ 691,100	Not Applicable
FINAL DESIGN SERVICE	ES								
200 F	Project Management		\$	22 000	•	07.500			
	gency Coordination		\$	32,000	\$		5		
	Design Project Meetings and Workshops			8,700	\$	19,800	\$		
	VTP Solids Handling Evaluation		\$	55,800	S	23,000	9		
200	ield Survey		\$	2	\$	20,000	5	20,000	
			\$	-	\$	21,000	\$	21,000	
	eotechnical Investigations		\$	29,600	\$	14,000	\$	43,600	
	reparation of Design Drawings								
	ew Disinfection Building		\$	286,400	\$	125,000	\$	411,400	
	zone System		\$	121	\$	1,093,000	\$		
	ehab Existing		\$	325,500	\$	395,000	\$		
240.4 M	aintenance Shop Remodel		S	35,000	\$	135,000	\$		
245 Preparation	of Specifications		\$	28,000	\$	65,000	\$		
250 Contractor	Prequalfications		\$	10,000	\$	3,000			
255 Cost Estima	ites		S	24,500	\$		\$		
260 Project Adv	ertising and bidding		\$			62,000	\$	86,500	
	ibtotal (Authorized Lump Sum Services	e)	\$	20,000 855,500	\$ \$	13,000	\$	33,000	
	, , , , , , , , , , , , , , , , , , , ,	-/	•	000,000	Þ	2,056,300	\$	2,911,800	
CONSTRUCTION ADMIT	NISTRATION SERVICES								
300 Project Adm			\$				17-201		
	dget and Schedule			-			\$	-	
	ernal Project Coordination		\$	-	\$	23,520	\$	23,520	
	Drawings and Specifications		\$	-	\$	17,640	\$	17,640	
310 Progress Me	eetings and Workshops		\$	-	\$	24,100	\$	24,100	
	Construction Meeting		\$	-			\$	-	
			\$	-	\$	5,460	\$	5,460	
310.2 Au	end Monthly Construction Progress Meeti	ngs	\$	-	\$	64,960	\$	64,960	
	ephone Project Meetings		\$	-	\$	25,200	\$	25,200	
	ecial On-Site Meetings		\$	-	\$	25,200	\$	25,200	
315 Prepare Res			\$: -			\$	-	
	Responses		\$	-	\$	77,100	S	77,100	
	ntract Document Clarifications		\$	2	\$	15,600	\$	15,600	
	intain RFI and CDC Logs		\$	-	\$	19,200	\$	19,200	
320 Review Shop	Drawings and Other Submittals		\$		100	10,200	\$	19,200	
320.1 Initi	al Submittal Review		\$		\$	262,500			
320.2 Res	ubmittal Review		\$		\$		\$	262,500	
320.3 Spe	cial Submittal Review Meetings		\$		\$	58,500	\$	58,500	
	tractors Request for Changes		\$	-		32,160	\$	32,160	
	nge Order Request andChange Order			-	\$	40,560	\$	40,560	
335 Review Month	nly Payment Requests		5	-	\$	37,600	\$	37,600	
340 Miscellaneous		\$		-	\$	13,320	\$	13,320	
		\$					\$	-	
	ory Witness Test (EIC Review)	\$		(7.0)	\$	11,880	\$	11,880	
01000	ntain Project Database	\$	3	-	\$	19,200	\$	19,200	
	struction Substantial Completion Walkthro	ough \$	5	-	\$	7,680	\$	7,680	
	dination with ODEQ Staff	\$	i	-	\$	14,980	\$	14,980	
	ugh and Acceptance				\$	15,560	\$	15,560	
	total	\$			\$	811,920	\$	811,920	
RESIDENT INSPECTION S						0,1,020	φ	011,320	
400 On-Site Inspe	ection Services	\$		2					
	dent Inspection	\$			\$	050.000	•	000 00-	
	trical I&C Inspection	\$				256,900	\$	256,900	
	cial Inspections	\$			\$	52,000	\$	52,000	
	total	٥		•	\$	32,000	\$	32,000	
OST CONSTRUCTION						\$340,900		\$340,900	

500 Prepare Electronic O&M Manual	\$	8	s	126,900	s	400.000		
510 Prepare As Constructed Drawings	•				Ф	126,900		
520 Training and Start Up assistance	φ	2	\$	47,250	\$	47,250		
520 4 T	\$	*						
520.1 Training Sessions	S		S	44.000				
520.2 Startup Assistance		-	2	14,800	\$	14,800		
Subtotal	\$	2.5	\$	36,200	\$	36.200		
Subtotal			\$	225,150	\$	225,150		
Subtotal Engineering Services Through Constru Allowance (separate, written authorization required prior	ction or to billing)	\$855,500		\$3,525,270	\$	4,380,770	\$ 26,003,200.00	16.8%
260.5 Bidding of Separate Project		\$0		\$39,000		\$39,000		
240.3B Solids Disposal Improvements		\$0		\$52,000				
Subtotal (Allotme	ente)	\$0				\$52,000		
The second secon	onto)	\$0		\$91,000		\$91,000		
TOTAL CONTRACT AMOUNT		\$1,546,600		\$3,616,270	\$	5,162,870		